

## Product benefits of Polysystem Walkway



### EXCELLENT

#### ENVIRONMENTALLY FRIENDLY SOLUTION

Polysystem membranes are 100% recyclable, including packaging such as tapes and labels.



### SUPERIOR

#### SPEED AND SAFETY DURING INSTALLATION



### EXCELLENT

#### RESISTANCE TO HIGH AND LOW TEMPERATURE



### SUPERIOR

#### LIFE SPAN



### EXCELLENT

#### RESISTANCE TO UV RADIATION

Polysystem membranes do not require any kind of protection and can be directly exposed to the elements.



### EXCELLENT

#### PUNCTURE RESISTANCE

Polysystem membranes perform excellently when mechanically fastened.

## Polysystem Walkway

*Flexible polyolefin membranes (TPO) reinforced with glass fibre produced by co-extrusion of Fortuline R polyolefin alloy with a textured non-slip upper surface*

### Description

Over the last 15 years the European market has seen a trend towards consolidation in the area of TPO-based waterproofing products.

For years designers and installers alike have benefitted from the technical properties and the environmental advantages offered by these waterproofing sheets.

As one of the first manufacturers to see the possibilities offered by TPO (especially its environmentally friendly properties), Polysystem developed the range of Polysystem TPO products.

With the challenges of the future in mind, we have reorganised our product list, dividing the products into categories representing the use for which each is designed.

The new Polysystem range, alongside the more traditional roof waterproofing membranes, Polysystem, now also includes a range of Polysystem Hydro products for hydraulic applications as well as Polysystem Sub materials for use in underground conditions.

We are confident that our wide range of membranes and accessories for specific applications complete a product portfolio, which will meet all the requirements of our clients.

### Polysystem Walkway

**Polysystem Walkway** is reinforced with glass fibre with a textured non-slip finish, produced by co-extrusion of Fortuline R polyolefin alloy.


The upper and lower surfaces are coloured differently so that the integrity of the membrane layer can be monitored more easily during installation and service life.

**Polysystem Walkway** is designed for pedestrian walkways on specific roofing areas. The textured finish of the surface provides improved non-slip properties for greater safety.

**Polysystem Walkway** has been designed to increase puncture resistance and to protect the waterproofing membrane, thus ensuring the longest possible service life even under the harshest conditions.



**POLISYSTEM UK LTD.®**

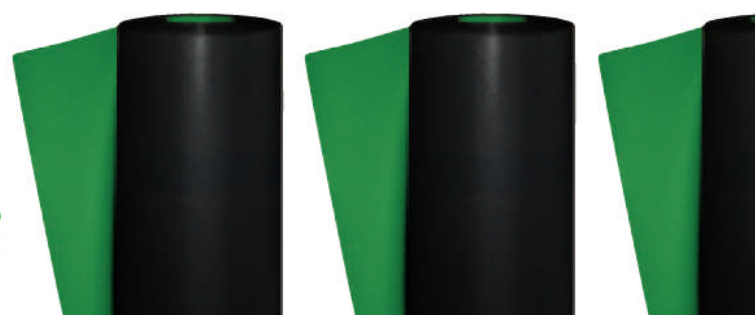

# Polisystem Walkway



## Field of use

Walkway areas on roofs waterproofed with Polisystem Roof Membranes

## Installation

Weld using hot air (indicative conditions: 350°C at 2m/min)

## Standard colours

Green top surface and black underneath (single layer)

**N.B. Other colours available on request**

Characteristics	Norms	U.M.	Test results
Standard thickness (1)	EN 1849-2	mm	2.00
Static indentation	EN 12730-B	kg	25
Static puncture	EN 12691-B	mm	1000
Dimensional stability			
MD	EN 1107-2	%	0.1
CMD		%	0.1
UV resistance	EN 1297		Pass
Dangerous substances		The product does not contain hazardous substances	

Tolerances according to EN 13956

1) Measured on top of the embossing

Polisystem UK Ltd.  
24 Warwick Street, Rugby, Warwickshire CV21 3DW

Tel - 01788 555941  
Fax - 01788 555942  
Email - info@polisystem.co.uk  
Web - www.polisystem.co.uk



**POLISYSTEM UK LTD.®**